Journal of New Developments in Chemistry
Open Access - Peer-Reviewed - ISSN 2377-2549

Portico Archived | Crossref DOI | CC BY 4.0 Licensed

Research Article

Assessing Performance of Cattle Dung and Waste Cooked Foods in Producing Biogas as Single Substrate and Mixed Substrates in Kampala Uganda

J Mutesasira [1], I.Z Mukasa-Tebandeke [2*], HZ Wasajja [3], R Nankinga [3]

[1] External studies department, Institute of distance Education, Makerere University

[2] Chemistry Department, School of Physical Sciences, Makerere University

[3] Departments of Earth Sciences, Wesleyan University, Connecticut USA

*** Correspondence:** I.Z Mukasa-Tebandeke, Chemistry Department, School of Physical Sciences, Makerere University, Uganda.

Published citation: J Mutesasira, I.Z Mukasa-Tebandeke, HZ Wasajja, R Nankinga (2019) **Assessing Performance of Cattle Dung and Waste Cooked Foods in Producing Biogas as Single Substrate and Mixed Substrates in Kampala Uganda**. *Journal of New Developments in Chemistry* - 2(2):31-41. https://doi.org/10.14302/issn.2377-2549.jndc-19-2701

Article DOI: 10.14302/issn.2377-2549.jndc-19-2701

Abstract

Biogas is an anaerobic degradation product formed from aqueous slurry of organic waste in a digester. It can be produced from cattle dung (cd), chicken droppings, decaying leaves, kitchen waste foods (kwf), sewage sludge, slaughter house, goat, pig or sheep manure. Aqueous slurry of 200g/L of mixed or single substrate of cattle dung or/and kitchen waste evolved up to 400mL of biogas at ambient temperatures. The rate of gas evolution reached 5mL/day on the 15th day using 25% cd mixed slurry. The rates of degradation attained in the mixtures were 1.42ml/g for cd; 1.58mL/g for kwf; 1.78mL/g for 75% cd mixed substrate; 1.78mL/g for 50% cd mixed substrate; 1.92mL/g for 25% cd mixed substrate slurries. The comparative rate of biogas formation ranged from 1.25 to 1.35 which was in agreement with the range published in literature of 0.8 to 5.5. Biogas can be synthesized efficiently at ambient temperature in Kampala as was done at mesophilic temperatures elsewhere. However, it may be necessary to attempt producing biogas at different pH and temperatures as well as using other substrates and inoculums.

Keywords:
Substrate; co-generation; digester; cattle dung; bio-waste; kitchen waste


Article Information	
Academic Editor	Yujia Liang, University of Maryland, College Park, MD, USA.
Received Date	5 March 2019
Accepted Date	2 April 2019
Published Date	12 April 2019
Online	12 April 2019
Publication	Volume 2; Issue 2; Pages 31–41
Copyright	© 2019 Mutesasira J, et al.
License	This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited. https://creativecommons.org/licenses/by/4.0/

Introduction

Biogas was defined as gas formed by biological decomposition of organic matter in the absence of oxygen and it originates from biogenic materials so it is a biofuel. Interest in synthesis of gas formed by decomposing organic matter was first reported in the 17th century. Later it was found that gas produced from cattle manure and kitchen waste can be used for lighting and cooking in much the same as natural gas is used. It is now known that it contains up to 50% methane, a renewable source of energy that can be used for heating, generating electricity and other operations based on internal combustion engines [1]. Biogas was reported as a mixture of gases including methane, carbon dioxide, hydrogen and others [2], [3], [4]. Whereas kitchen waste is any substance raw or cooked which is discharged or remains after [5] cattle dung is black-greenish material that passes out of the rumen of herbivores after feeding on grass and other materials [6]. It was reported that digestion of kitchen waste as a single substrate yielded 27% of gas [7] yet cattle dung as a single substrate yielded 17.9% [8]. There are variations in quantities of gas formed when single or mixed substrates are digested [9].

The processes yielding biogas involve anaerobiosis whereby archaea bacteria, algae, fungi, protozoa and or viruses degrade organic matter. Bio digestion has been employed to treat organic wastes to recover renewable [10], [11]. Anaerobiosis involves a series of processes in which microbes biodegrade organic materials [1], [12]. Synthesis of biogas can be coupled to waste management because it produces bio residue which serves as manure and a gas suitable to replace fossil fuels [13], [14]. The process of bio digestion starts with bacteria hydrolyzing organic matter placed in a digester to transform insoluble organic polymers like cellulose to soluble products, on which different protozoa act [13]. Acetogenic bacteria convert amino acids and sugars to methane, hydrogen, carbon dioxide and ammonia [15].

Flow Diagram for Biogas Formation was Summarized by Babel et al 2016 [16] as Follows:

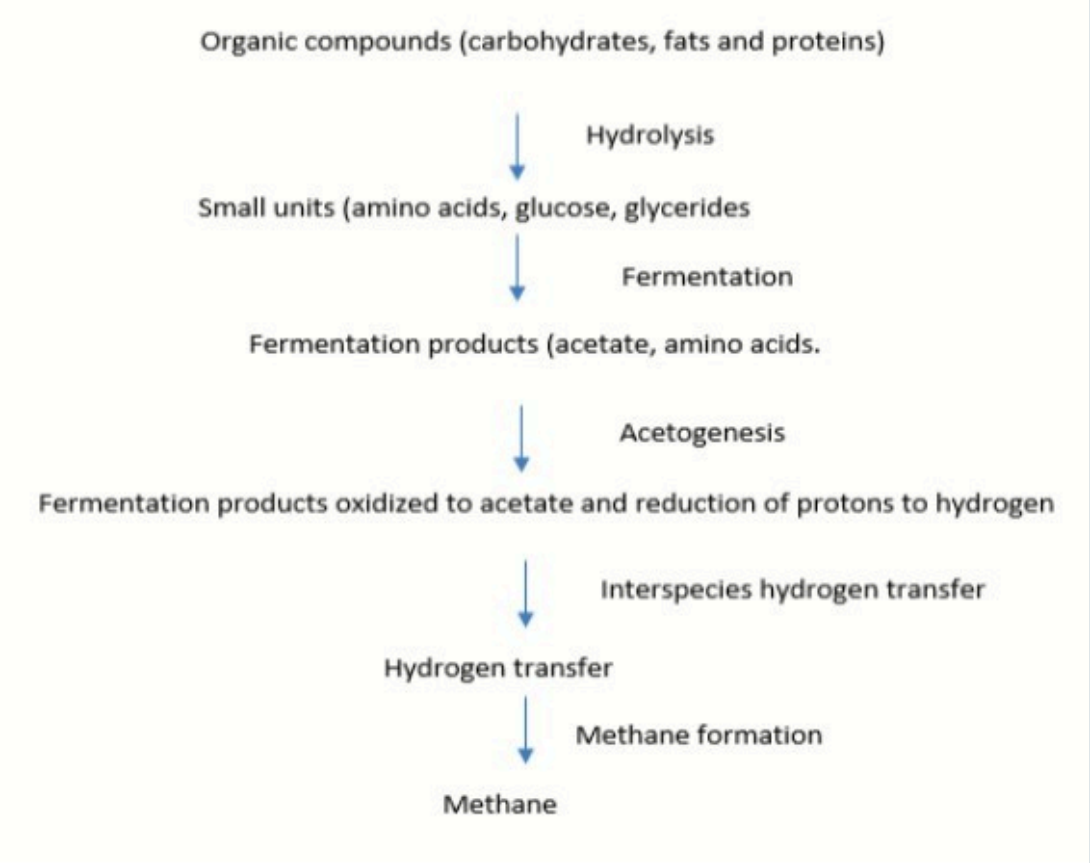

The two key processes in bio digestion were reported to be mesophilic and thermophilic in nature. Further, it was shown that digesters that generate biogas from kitchen waste involve thermophilic microbes [17].

Cogeneration or co-digestion of biogas is simultaneous decomposition of homogeneous slurry of two or more substrates [10]. Cogeneration of biogas from mixed slurry of solid from slaughter house, manure, fruits and vegetables was reported to have increased the yield of methane by 44% as compared to single substrate digestion of cattle dung or kitchen waste [18]. It was further reported that sodium hydroxide added to kitchen waste increased the yield of biogas formed [19]. Waste food materials were shown to have high potential for the production of methane because they can be digested rapidly [18]. Further food waste was shown to be a highly desired substrate for anaerobic digestion because it accomplishes 80% of the theoretical methane yield in 10 days of digestion [20]. It has been shown further that fats and oils produced higher volumes of gas than other organic wastes of different biochemical composition [21]. Fats and oils reduced organic wastes possessing higher gas potentials than sugars or alcohols [22].

Fats and oils were degraded in high percentages in cogeneration with simulated organic fractions of municipal solid waste with result indicating anaerobic digestion of lipids [21], [22], [23]. To alleviate expenditure on treating organic waste, it was necessary to use co-digestion to produce the renewable energy source in addition to manure [24]. The volume of gas formed from such digesters fluctuates, but can be stabilized by use a variety of substrates applied simultaneously in cogeneration processes [10]. Sewage sludge in mixture with other substrates yielded more gas than single substrate [14]. This has been associated with positive synergism established in the digestion medium together with supply of missing nutrients from the co-substrates [25]. In addition to synergism, cogeneration provides a better nutrient balance for the anaerobes, so it results in high yield of gas [2]. Thus slurry containing slaughter house manure, fruit and vegetable waste yielded even bigger volume of gas than slaughter house manure mixed with fruit waste [15]. Cogeneration was shown to increase yield of biogas to 26% [26] because it supplied additional nutrients to the anaerobes. Digestion of mixed slurry of manure and organic waste consisted of combining several wastes with complementary characteristics in order to improve produc-

tion of the gas [27]. Cogeneration of biogas is based on trial and error practices so different yields are obtained with different substrates but gas operators need to know the effects of cogeneration [10]. Food residues from homes, restaurants or hotels serve as good substrate for anaerobiosis satisfying up to 80% of the theoretical yield of methane [17]. Cogeneration slurries containing fats, greases and oils, waste waters, manure from slaughter houses, dairy industries and fat refineries have higher methane potential as fats and oils are reduced organic materials [13], [22], [23]. This study has targeted cogeneration of gas from cattle dung and kitchen waste in ratios of 1:1, 1: 3 and 3:1 in comparison to generation of gas using cattle dung and kitchen waste as single substrates.

The yield of biogas was shown to be affected by type and composition of the substrate, microbial composition, temperature, moisture, bioreactor design and pH [28]. Anaerobic digestion is catalyzed by microorganisms that convert macro molecules to low molar mass substances. The common sources of inoculums are sewage [29], however, all aggregates like flocs, biofilms, granules and mats may be used [30]. Heterotrophic organisms like *clostridium* species are common anaerobic digesters but a consortium of microbial like achtinmycytes, *Thermomonospis Ralslsttonia [31], [32]*.

Low temperatures were reported to decrease microbial growth, rates, substrate utilization and rate of biogas formation [33], [34]. It also leads to exhaustion of cell energy and leaking of intracellular substances [35]. High temperatures lower gas yield because volatile gases like ammonia are produced [36]. The best operating temperature is 35^{o}C, a mesophilic temperature [37]. Neutral to alkaline pH were reported suitable for anaerobiosis of organic waste [4], [38]. High moisture content facilitates anaerobiosis [39]. The availability and complexity of organic materials affect anaerobic digestion. The digester consists of pressure resistant container mounted with stirrer and reservoir. The volume of gas formed collected over sodium hydroxide solution was measured very after three-day interval for 28 days. On the 28th day, the digestion mixture was discharged. The digester was cleaned and used over again. This study has aimed at using cattle dung and cooked waste foods singly or mixed to produce biogas.

Materials and Methods

Sampling

From a kraal (zero-grazing facility), wet cattle dung (10kg) was collected. From the same kraal, cattle urine (10L) was collected. From the garbage dumping site, cooked waste food materials (10kg) from a nearby restaurant at Wandegeya market were collected.

Cattle Dung Digestion

Wet cattle dung (50g) was put in a can and cattle urine (200ml) and sludge inoculum (50mL) were added. The mixture was stirred to form slurry.

Kitchen Waste Digestion

Waste food materials (50g) were put in a can and cattle urine (200ml) and sludge inoculum (50mL) were added. The mixture was stirred to form slurry. The slurry was fed in the digester.

Co-Digestion of Cattle Dung and Food Waste

This was Carried out in Three Different ways as Shown Below

Wet cattle dung (25g) and food waste (25g) were put in a can and cattle urine (200mL) and sludge inoculum (50mL) were added. The mixture was stirred to form slurry. The slurry was fed in the digester and carbon dioxide bubbled through slurry to eliminate oxygen.

Wet cattle dung (13g) and waste food (37g) were put in a can and cattle urine (200mL) and sludge inoculum (50mL) were added. The mixture was stirred to form a slurry. The slurry was fed in the digester and carbon dioxide bubbled through slurry to eliminate oxygen.

Wet cattle dung (37g) and waste food (13g) were put in a can and cattle urine (200mL) and sludge inoculum (50mL) were added. The mixture was stirred to form a slurry. The slurry was fed in the digester and carbon dioxide bubbled through slurry to eliminate oxygen.

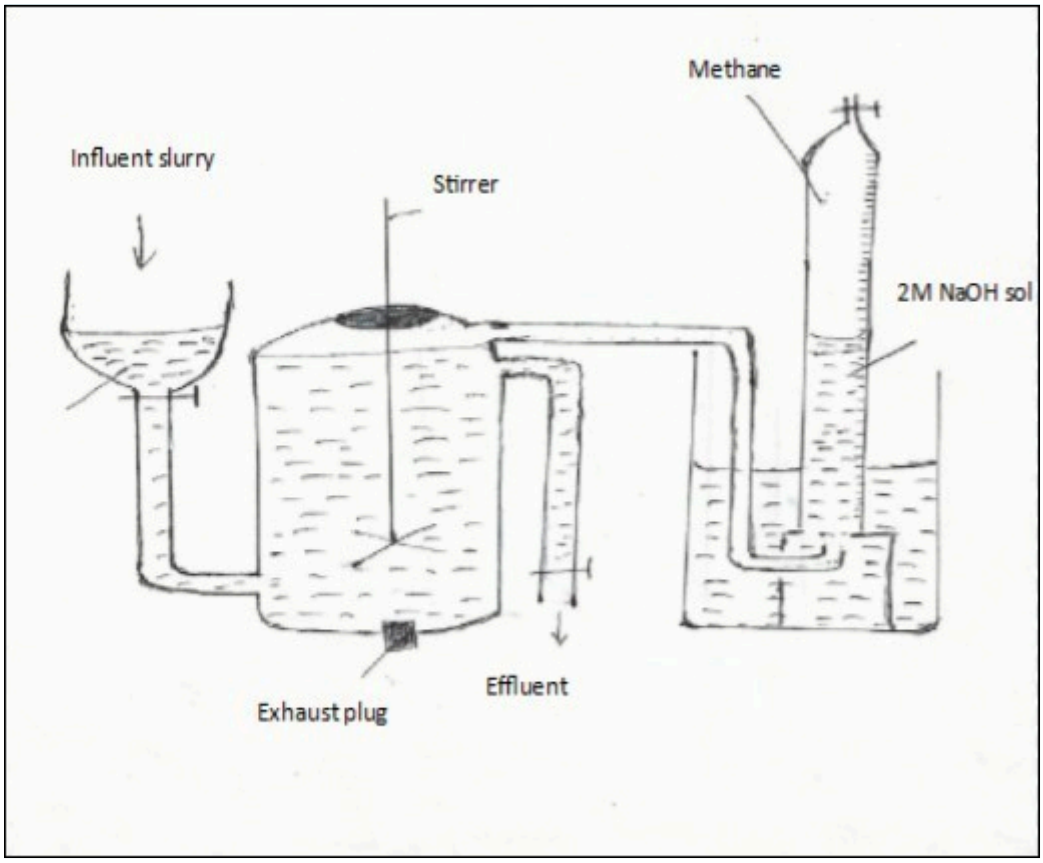


Figure 1. Layout of instruments in experiment

Instrumentation

The slurry was fed in the digester shown below through the reservoir while tap leading to the effluent was open to allow air out of the reactor. Once the reservoir was nearly full, addition of slurry was stopped, carbon dioxide was bubbled through the slurry for five minutes and the tap leading to the effluent was closed. The stirring started and slurry left to decompose while the electric stirrer was running. The gas formed was collected in a graduated glass tube over sodium hydroxide solution to absorb carbon dioxide. (Figure 1).

Results and Discussion

The volume of biogas formed by degradation of cattle dung, kitchen waste and admixtures of these two was measured and recorded using the apparatus shown in Figure 2. Each experiment was repeated thrice and the average volume recorded over the 28 days' period was used to plot Figure 2 below.

Production of gas from 50g of cattle dung, 50g of kitchen food waste and their admixtures in 50%, 75% and 25% cattle dung in slurry with cattle urine (200mL) and sludge inoculums yielded graphs in Figure 2 for which the coefficients of linearity were and the equations were respectively.

The production of biogas started by day 3 of experiment showing that the time between set up of experiment and initial formation of gas was not utilized by the anaerobes to act on the slurry. This has been explained as time used by the anaerobes to use up oxygen present in the slurry; and after oxygen is depleted, acid forming anaerobes became active so gas production started [40].

Production of biogas increased steadily at first and then sharply after day 9 until it attained its peak on day 18. When gas production had just begun, the microbes in the slurry had just become active and began increasing their population [40], and the microbes needed an acclimatization period [41]. The steady increase in biogas was explained by the fact that the microbes' population was fully established in large enough numbers and were therefore progressively acting on more and more substrate as their numbers increased [40].

 DOI: 10.14302/issn.2377-2549.jndc-19-2701

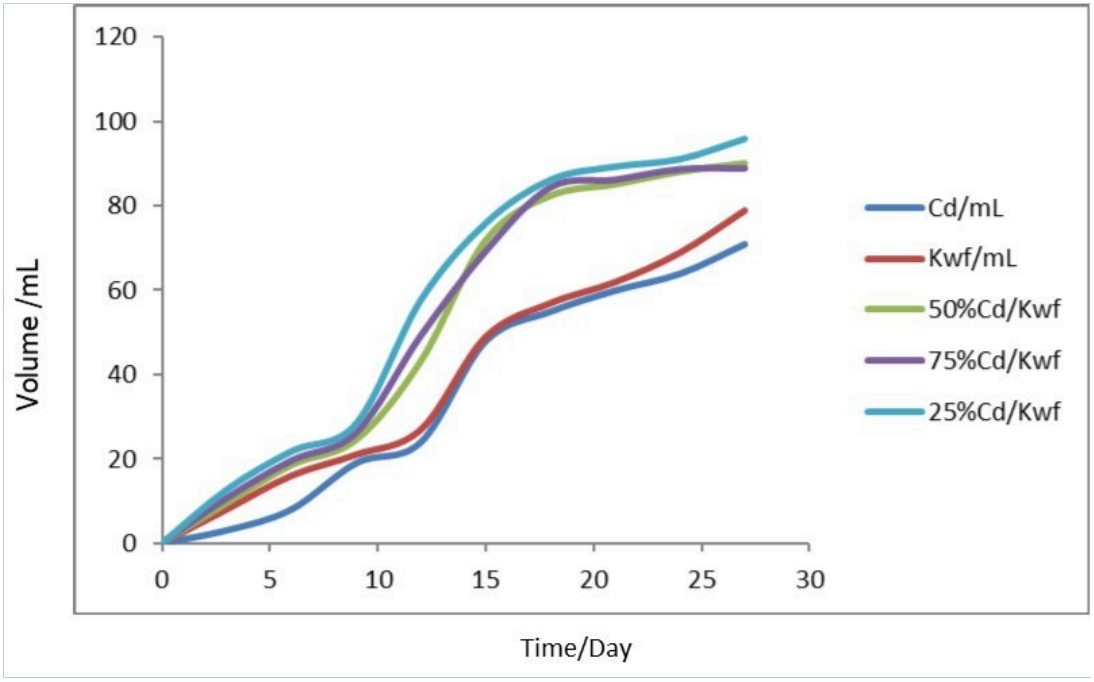


Figure 2. Plot of volume of gas formed against time

By the time the peak production was attained, the anaerobes were acting on maximum quantity of organic matter suspended in the slurry [28].

The drop in volume of gas formed beyond the peak may have resulted from decrease in quantity of substrate available to the microbes to act on or even shift in the balance of carbon to nitrogen ratio available to the anaerobes to use [41]. The volume of gas formed from different generating substrates varied with cattle dung yielding least yet cogeneration mixture made of 50% cattle dung produced the highest volume. It was observed that after day 9, the volume of gas formed from all digestion mixtures kept increasing steadily.

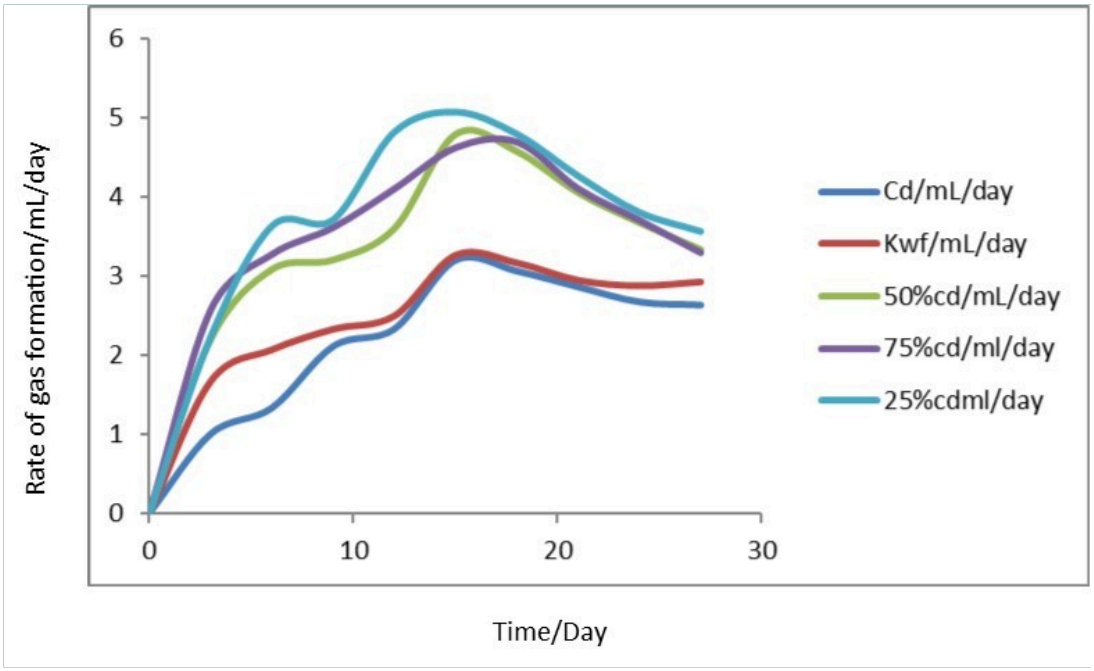


Figure 3. Plot of rate of biogas formation against time

The rate of change in volume with time in Figure 3 revealed that the higher the rate of evolution of gas was attained by the 15th day for single substrate and mixed substrate digestions. However, smaller rates of evolution of gas occurred for single substrate than for mixed substrates due to positive synergism brought about by balance of the carbon to nitrogen ratio getting closer to 30:1 [41]. After day 15, the rate of degradation decreased due to depletion of suspended ingredients. It would therefore be recommendable that if biogas is generated for commercial needs, one needs six to seven digesters arranged in series such that they are started one after the other after a day and left to run up to the 15th day, then restarted on the 18th day by feeding the first in the same series as was done at the beginning.

By comparison, the volume of biogas formed from slurry of cattle dung was less than that formed from kitchen food waste in cattle urine probably due to kitchen food waste providing a better nutrient balance for carbon to nitrogen than cattle dung which was largely lignified cellulose [40]. The microbes survive better in media containing more nitrogen than those containing less because nitrogen is an essential element for their life. The anaerobes metabolize organic matter with the aid of enzymes reducing carbohydrates, proteins and fats to methane. There is dependency of quantity of gas formed on the carbon to nitrogen (C/N) ratio of the slurry digested [43]. The optimum ratio of C/N was reported to be 30:1. The anaerobes consume carbon 30 times faster than nitrogen [41] to convert organic waste to a renewable energy source, biogas. The chemical composition and structure of lignocellulosic materials hinder the rate of bio digestion of slurry as hydrolysis of complex matter to soluble compounds must be the rate-determining or limiting step for the decomposition of the slurry with high solid content like cattle dung slurry [28], [44].

Cogeneration is simultaneous generation of biogas using homogeneous slurry of two or more substrates, each of which can produce the gas if digested singly. The results on cogeneration of biogas using slurries containing cattle dung cd and kitchen food wastes kwf in a laboratory scale digester at ambient temperatures are shown in Figure 3.

As shown on Figure 3, the average rate of evolution biogas from aqueous slurry of cd and kwf because the combination brought together the positive characteristic of feed stocks and potentially bringing better digestion performance as well as more rapid growth of microbial population in the mixed substrate than in the single substrate [40], [45].

It can be observed that very significant evolution of gas started after day 3. Evolution of biogas was slower for cd than kwf because cd slurry had higher content of lignified cellulose than kwf. Cellulose requires more time and adverse conditions to hydrolyze than ordinary carbohydrates present in kwfs. Additionally, cooking could have weakened bonds in kwfs. So the retention time for cd was higher than for kwf [46]. The maximum rate of volume increase biogas formed was for mixture made of 25% cd on the 15th day. This was interpreted as showing that the slurry contained the best C/N ratio of all the samples tested [41]. So this mixed substrate slurry containing cd and kwf approached the optimum C/N ratio of 30:1 [47].

The average rate of decomposition expressed as volume of gas formed/g of substrate digested is shown in Figure 4 below for cd, kwf and mixtures of cd and kwfs. Figure 4 above illustrates that when equal total masses of substrates were fed in the digesters at ambient temperatures differing mean rates of decomposition resulted because the volumes of biogas registered were different. The cogeneration slurries showed higher average rates of decomposition than single substrate slurries of cd or kwf. The average rate of decomposition for cd was 1.42± 0.29ml/g; that for kwf was 1.58± 0.21ml/g; that made of 75% cd was 1.78± 0.35mL/g; for 50% cd was 1.80± 0.37mL/g and for 25% cd was 1.92± 0.40mL/g.

The mean rate of biogas formation for the cogeneration slurries containing cd and kwfs was obtained to be higher than for cd by the respective factors of 1.254 for 75% cd; 1.268 for 75% cd and 1.352 for 25% cd and these values lie within the range of values of enhancement that were reported to lie between 0.8 to 5.5 as compared to single substrate digestion slurries alone [40], [45] and this was brought about by synergistic tendencies whereby carbohydrates, fats and proteins simultaneously contribute to formation of biogas.

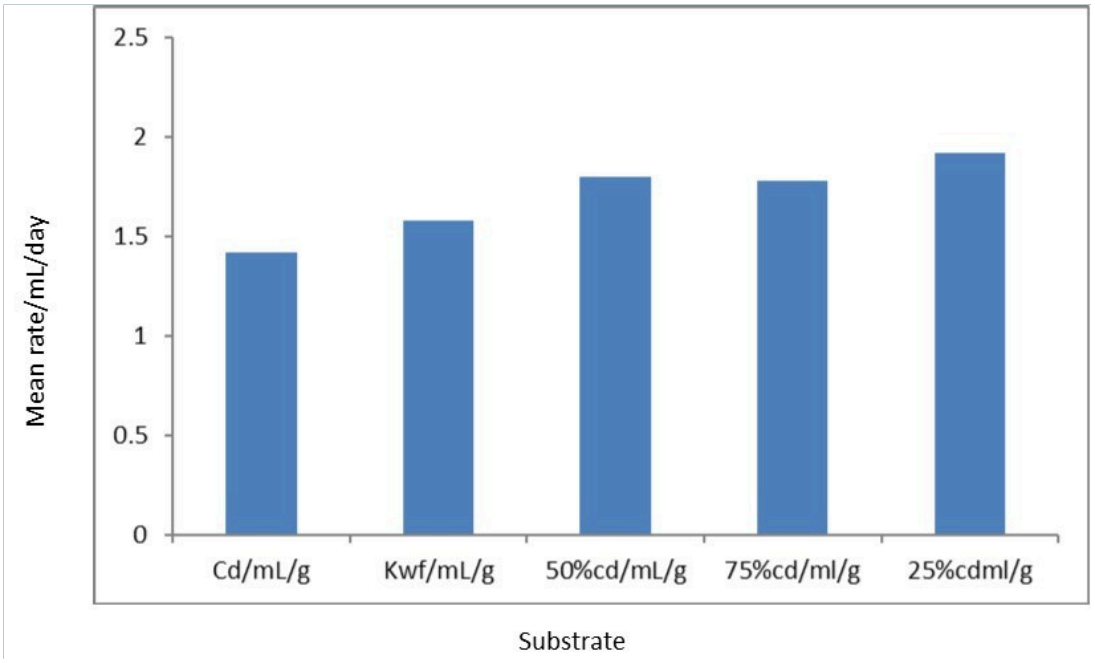


Figure 4. Rate of degradation in slurries containing 200g/L at ambient temperatures

Conclusions

The average optimum amount of biogas was produced by anaerobic digestion of cd and kwf in a period of 18 days, the slurry of cd 50g/200mL yielded 275± 2.03mL/L; kwf 50g/200mL yielded 329.2± 5.77mL/L; 50% cd yielded329.2± 3.10mL/L; 75% cd yielded 422.0± 3.56 mL/L; 25% yielded 431.5± 4.65 mL/L.

The average rate of gas evolution reached 5mL/day on the 15th day using 25% cd mixed slurry. The overall rates of degradation attained in the mixtures were 1.42 ± 0.26ml/g for cd; 1.58±0.33mL/g for kwf; 1.78± 0.38mL/g for 75% cd mixed substrate; 1.78± 0.29 mL/g for 50% cd mixed substrate; 1.92± 0.21 mL/g for 25% cd mixed substrate slurries in the 200g/L load. The comparative rate of biogas formation ranged from 1.25 to 1.35 which was in agreement with the range published in literature of 0.8 to 5.5.

Biogas can be synthesized efficiently at ambient temperatures in Kampala as was done at mesophilic temperatures elsewhere.

Cd and kwf can produce significant quantities of biogas if digested anaerobically.

Recommendation

The digestion of slurry of single cd, kwf and mixed substrates of cd, kwf should be tested for evolution of gas at 37^{o}C, the reported optimum temperature.

Attempts to test on the effect of pH on yield of biogas need be determined.

Studies on C/N ratios for cd and kwf should be documented to assert the nutrient balance levels.

However, it may be necessary to attempt producing biogas at different pH and temperatures as well as using other substrates and inoculums.

Competing Interests

The authors have declared that no competing interests exist.

Acknowledgements

We are indebted to Prof G.W. Nyakairu and Mr. Moses Mutenyo for the design and technical advice on the design of the bio-digester.

References

1. Ghaly A. A comparative study of anaerobic digestion of acid cheese, whey, and diary manure in a two-stage reactor. *Bioresour. Technol*. 2016;58:61–72.
2. Deasai M, Patel V, Mudamwar D. Effect of temperature and retention time on biomethanation of cheese-whey-poultry waste-cattle dung. *Environmental pollution*. 1994;83:311–315.
3. Gunaseelan VN. Anaerobic digestion of biomass for methane production, a review. *Biomass and Bioenergy*. 1997;15:83–114.
4. Ward AJ, Hotts PJ, Holliman PJ, Jones BI. Optimization of methane anaerobic digestion of agricultural resources. *Bioresour. Technol*. 2008;99:7928–7940.
5. Halder N. Characterization of tea waste and cooked waste as potential feed stock for biogas production. *International journal of renewable energy research*. 2016;03(07):11–16.
6. Behera SK, Park JM, Kim KH, Park H. Methane production from food waste leachate in laboratory scale simulated landfill. *Waste Manage*. 2010;30:1502–1508. https://doi.org/10.1016/j.wasman.2010.02.028
7. Lesteur M, Belim-Maurel V, Gonzalez C, Latrille E, Rogers JM, Jungua C, Steyer J. Alternative methods for determining anaerobic biodegradability: a review. *Process. Biochem*. 2010;45:431–440. https://doi.org/10.1016/j.procbio.2009.11.018
8. Battista F, Roggers B, Fino B, Erquens F. Towards the full scale production of agro-food feed mixture for biogas. *Journal of environmental chemical engineering*. 2013;1:1213–1230.
9. Collanghan F, Wase D, Thayanityl K, Forster C. Continuous co-digestion of cattle dung slurry with fruit, vegetable and chicken manure. *Biomass and Bioenergy*. 2016;22(1):71–77.
10. Gelegenis J, Georgakis D, Angelidaki I, Marvis V. Optimization of biogas production by codigesting whey with diluted poultry manure. *Renew. Energy*. 2007;32:2147–2160.
11. Cuetoes MI, Gomez X, Oterio M, Muran A. Anaerobic digestion of solid slaughter house waste (SHW) at laboratory scale: Influence of co-digestion with organic fraction of municipal solid waste (OFMSW). *Biochem. Eng. J*. 2008;40:90–106.
12. Gomez G, Cuetos M J, Cara J, Moran A, Garcia AI. Anaerobic codigestion of primary sludge and fruit and vegetable fraction of the municipal solid wastes. *Renew. Energy*. 2006;31:2017–2024.
13. Li YY, Sasaki H, Yamshita K, Seki K, Kamigochi I. High rate methane fermentation of lipid-rich food wastes by a high solids co-digestion process. *Water Sci. Technol*. 2012;45:143–145.
14. Mata-Alvarez J, Dosta J, Mace S, Astals S. Codigestion of solid wate: a review of its uses and perspectives including modeling. *Critical reviews in Biotechnology*. 2011;11(22):817113. https://doi.org/10.3109/07388551.2010.525496
15. Murto M, Bjournsson L, Mattiason B. Impact of industrial waste in anaerobic co-digestion of sewage sludge and pig manure. *J. Environ. Manage*. 2018;70(2):101–107.
16. Babel S, Tang Sae, Pecharaply A. Anaerobic codigestion of sewage and brewery sludge for biogas production and land application. *Int, J. Environ. Sci. Technol*. 2016;6(1):131–140.
17. Zhang I, Lee W Y, Jaung X. Anaerobic co-digestion of food waste and piggery waste water: focusing on the role of trace elements. *Bioresour. Technol.* 2011. https://doi.org/10.1016/j.biortech.2011.01.082
18. Alvarez R, Liden G. Semi continuous co-digestion of solid slaughter house waste, manure and fruit nd vegetable waste. *Renewable energy*. 2018.
19. Yu H, Huang GH. Effects of sodium on pH control amendment on the composting of food waste. *Bioresour. Technol*. 2000;100:2005–2011.
20. Clements J, Trimborn M, Weiland P, Amon B. Mitigation of greenhouse gas emission by anaerobic digestion of cattle dung slurry. *Agriculture, ecosystem and environment*. 2014;112:171–177.
21. Nielson HB, Ahring BK. Responses of biogas process to pulses of oleate in reactor treating mixture of cattle and pig manure. *Biotechnol. Bioeng*. 2006;95:96–105.
22. Pereira MA, Cavaleiro AJ, Mota M, Alves MM. Accummulation of long chain fatty acids onto anaerobic sludge under steady state and shock loading conditions: effect on acetogenic and methanogeinic activity. *Water Sci. Technol*. 2013;48(9):33–40.
23. Fernandez A, Sanchez A, Font X. Anaerobic codigestion of simulated organic fraction of municipal solid waste and fats of animal and vegetable origin. *Biochem. Eng. J*. 2012;26:22–28.
24. Bonallagui H, Toutham Y, Cheikh RB, Hamdi M. Bioreactor performance in anaerobic digestion of fruit and vegetable wastes. *Process Biochem*. 2005;40:989–995.

25. Castellucci S, Silvia Cocchi S, Allegrini E, Vecchione L. Anaerobic digestion and co-digestion of slaughter house wastes. *Journal of Agricultural engineering*. 2013;XLIV(s2):e104.
26. Tang SL, Wong CL, Ellis KV. An optimization model for the selection of waste water and sewage treatment alternative. *J. Chart. Water E*. 1997;11(1):14–23.
27. Gelegenis J, Georgakis D, Angelidaki I, Marvis V. Optimization of biogas production by co-digesting whey with diluted poultry manure. *Renew. Energy*. 2007;32:2147–2160. https://doi.org/10.1016/j.renene.2006.11.015
28. Khalid A, Arshad M, Anjum M, Mahmood T, Dawson R. The anaerobic digestion of solid waste, a review. *Waste manage*. 2011;31:1737–1744.
29. Forster-Carneiro T, Perz M, Romero LI, Sales D. Dry thermophilic digestion of organic fraction of municipal solid waste, focusing on the inoculums sources. *Bioresour. Technol*. 2007;98:3195–3203.
30. Jeong F, Kim H, Nam J, Shin. Enhancement of bioenergy production and effluent quality of integrated optimized acidification with submerged anaerobic membrane reactor. *Bioresour. Technol*. 2010;101:1873–1876.
31. Fantozzi F, Buratti C. Biogas production from different substrates in an experimental continuously stirred tank reactor anaerobic digester. *Bioresour. Technol*. 2009;100:5783–5789. https://doi.org/10.1016/j.biortech.2009.06.013
32. Ike M, Inoue D, Miyano T, Liu TT, Seri K, Sorla S, Kadoshiz S. Microbial population dynamics in startup of a full scale anaerobic digester treating industrial food waste in Kyoto eco-energy project. *Bioresour. Technol*. 2010;101:3952–3957. https://doi.org/10.1016/j.biortech.2010.01.028
33. Kim JK, Oh BR, Chun YN, Kim SW. Effects of temperature and hydraulic retention time on anaerobic digestion of food waste. *J. Biosci. Bioeng*. 2006;102:328–332. https://doi.org/10.1263/jbb.102.328
34. Trecinsiki AP, Stuckey DC. Treatment of municipal solid waste leachate using a submerged anaerobic membrane at mesophilic temperature of recalcitrant in the permeate using G.C-MS. *Water Res*. 2010;44:671–680.
35. Kashyap DR, Dadwich KS, Sharma SK. Biomethanation under psychiophilic conditions, a review. *Bioresour. Technol*. 2003;87:147–153.
36. Fezzani B, Cheikh BK. Optimization of mesophilic anaerobic co-digestion of olive mill waste and olive waste waters. *Desalination*. 2008;228(1):157–167.
37. Chae JK, Jang A, Tim SK. The effects of digestion temperature and temperature shock on the biogas yield from the mesophilic anaerobic digestion of swine manure. *Bioresour. Technol*. 2008;90:1–5. https://doi.org/10.1016/j.biortech.2006.11.063
38. Lei Z, Chen J, Zhang Z, Singura H. Methane production with acclimatized anaerobes: effect of phosphate supplementation. *Bioresour. Technol*. 2010;101:4343–4345.
39. Harnadez-Barrel MC, Benavides LM, Perez DJ, Delgado OB. The effect of moisture regimes on the anaerobic degradation of municipal solid waste from Matapex Mexico. *Waste Manage*. 2008;28:16–20.
40. Iqbal SA, Rahaman S, Rahman M, Yousuf A. Anaerobic digestion of kitchen waste to produce biogas. *Procedia Engineering*. 2014;90:657–662. https://doi.org/10.1016/j.proeng.2014.11.787
41. Okonkwo CU, Onokpite E, Onokwai OA. Comparative study of the optimal ratio of biogas production from various organic wastes and weeds for digester/ restarted digester. *Journal of King Saud University Engineering Sciences*. 2018;30:124–129. https://doi.org/10.1016/j.jksues.2016.02.002
42. Erguler TH, Guven E, Demirer GN. Anaerobic treatment of olive imill waste in batch reactor. *Process biochemistry*. 2000;36:243–248.
43. Kampogas. *Green energy from organic waste*. 2011. http://www.axpo-kampogas.ch/index.php?path+home&lang=co
44. Chulhwan P, Chungeon L, Sangyong K, Yu C. Upgrading of anaerobic digestion by incorporating two different hydrolysis processes. *J.Biosci. Bioeng*. 2005;100:164–167.
45. Mackie P, Bryant MP. Anaerobic digestion of cattle waste at thermophilic temperatures. *Applied material biotechnology*. 1995;43:346–350.
46. Triolo JM, Sommer SG, Miller HD, Weisberger MR, Jiang X. A new alogarithm to characterize biodegradability of bioass during anaerobic digestion: Influence of lignin concentration on methane production potential. *Bioresour. Technol*. 2011;102:9395–9402.

47. Dandakidas V, Heuwinkel H, Lichti F, Drewens JE, Koch K. Correlation between biogas yield and chemical composition of energy crops. *Bioresour. Technol*. 2014;174:316–320.

Publisher's Note

All claims, opinions, data, and conclusions expressed in this article are solely those of the author(s) and contributor(s), and do not necessarily represent those of Open Access Pub, the journal, its editors, or reviewers. Open Access Pub does not guarantee or endorse any product, method, instruction, or claim discussed in the article, and disclaims responsibility for any injury to people or property resulting from ideas, methods, instructions, or products referred to in the content.