

Nature Inspired Bargain Optimization Algorithm for Effective Interpretation of Geoelectrical Data

Stanley Raj^{1,*}, J.P. Angelena¹, D. Senthil Kumar², S. Akshaya³, R. Dhamodharan⁴, M. Hariharan¹

¹Department of Physics, Loyola College, Chennai, Tamil Nadu-India

²Department of Physics, School of Science and Humanities, Vel Tech Rangarajan Dr. Sagunthala R&D Institute of Science and Technology, Avadi, Chennai 600 062, Tamil Nadu, India

³Department of Physics, SDNB Vaishnav College, Chrompet, Chennai,- 600 044, India

⁴Centre for Geotechnology, Manonmaniam Sundaranar University, Tamil Nadu, Tirunelveli

Abstract

Geoelectrical resistivity data collected from the ground contain lot of noises and errors. It requires efficient algorithm to reduce the errors to make an actual inversion models. Though different algorithm can be applied, nature inspired algorithm is more potential in inverting geoelectrical data in an elegant and comprehensive way. Bargain Optimization (BO) algorithm is framed on the concept of bargaining things to purchase for needs. In general, effective bargaining results in more profit and leads to loss when it fails. In this research work, Bargain Optimization algorithm is applied to invert geoelectrical data and the effective bargaining will take time to process and to obtain the required model. The input data is $AB/2$, apparent resistivity data and the inverted model through BO algorithm is successfully matched with the available litholog section of the study area. The output graphs have profit/loss bar graph, which reveals the status of bargaining during a particular number of epochs.

Corresponding author: A. Stanley Raj, Department of Physics, Loyola College, Chennai, Tamil Nadu-India, email: stanleyraj_84@yahoo.co.in, Phone: +91 9940120058

Keywords: Geoelectrical data, Inversion, Bargain Optimization algorithm, Geophysical study

Received: Apr 02, 2021

Accepted: May 22, 2021

Published: Jun 04, 2021

Introduction

Groundwater plays vital role in our ecosystem as it replenishes lakes, rivers wetlands etc., and used for principal source of drinking water and it is also utilized for industrial and agricultural purposes. The significant escalation of human activities and various reasons such as climate change, the global groundwater resources are under large stress. The stable advancement of various geophysical techniques with the substantial usage of different physical properties for the application of ground water exploration are electrical resistivity, magnetic susceptibility, elasticity, density and radioactivity [10,20]. Among the various kinds of geophysical prospecting techniques, the geoelectrical resistivity method has become a significant tool for groundwater exploration [21].

The Electrical resistivity method has usually been employed in determining the model parameters of the subsurface of our Earth[1]. Globally, Direct current resistivity methods of geoelectrical prospecting method are greatly employed for assessment of various aquifer parameters such as thickness and resistivity [9,15,17]. The interpretation of geoelectrical resistivity data is essential to recognize the idea of certainty in the subsurface system of the Earth and there is in need of an effective tool to guesstimate and evaluate the parameters which are appropriately related to the subsurface system. The optimization of geoelectrical resistivity inverse problems needs a suitable association between mathematical models and the physical model parameters. The evaluation of model parameters of the subsurface layer of the Earth has been effectively estimated with the incorporation of a powerful tool [13].

The process of optimization is one of the best techniques to evaluate the results. Basically, optimization involves in minimizing the errors between the both anticipated and observed results within the peculiar constraints. Several researchers applied neural networks coupled with other optimization algorithm to produce favorable results [5,6,7]. The Inputs defined, are of numerous variables that the function is framed into certain conditions to yield appreciable results. There are several optimization techniques that are nature inspired algorithms. Artificial Neural networks (ANN) is one of the biomimicking algorithm that estimates the

result on the basis of training progress and It shows its immense mapping proficiencies effectively between the input and output patterns. Since ANN learns through better framed examples, the training dataset was established synthetically and have been tested. The evident layer model delivers the information about the thickness and true resistivity of the subsurface layer [18].

Artificial neural networks have independent-learning competence and are of noise-immune and finds applications in numerous fields [11, 14]. Many researchers [3, 11, 15, 16] utilized ANN as an optimization tool for solving various geophysical problems. To an extent, various geophysical prospecting methods can be improved to congregate the number of solutions for inverse problems. To understand lithological constraint Bosch and [2] used gravity and magnetic prospecting methods which yields better results. Seismic prospecting method have been employed to estimate geophysical characteristics by [4,8,12] have done inversion to interpret geophysical data.

Methodology

Bargain optimization algorithm has been applied here for inverting geoelectrical data [19]

Steps Involved in Process of Bargaining

Step 1

Initialization

- A) Feeding input data
- B) Set up minimum error percent
- C) Set up time limit

In this process of initialization any nonlinear data can be feed as an input. Here in this article geoelectrical resistivity data obtained from different field data has been applied to evaluate the algorithm. As geology varies from region to region, electrical resistivity data obtained from the field is completely non-linear. It depends on many parameters, viz., porosity, humidity of the soil, atmospheric variations, etc. If the subsurface geology is very complex the resistivity variations can rapidly vary over short distances. Table 1 gives the resistivity values of common rocks, soil materials and chemicals (Keller and Frischknecht 1966, Daniels and

Alberty 1966).

Thus, setting up the minimum error percent and time required for 'bargaining' is very important. Bargaining concept is very similar to training in neural networks but exclusively novel in the concept of utilizing weights and profit/loss conception.

Step 2

Finding Tolerance Level

In this step algorithm find the difference between each data and the mean difference is fixed as the tolerance level. For a sample data size of n, mean absolute deviation can be calculated as the tolerance level,

$$T_i = \frac{1}{n} \sum_{i=1}^n x_i - \bar{x}_i$$

\bar{x}_i Is the mean of distribution.

This will be helpful in bringing the optimal solution for the problem, because the convergence rate and weight based learning is within this tolerance level. This step is very important to prepare the data for bargaining process

Step 3

Process of Bargaining

This process starts with all the prerequisites of the algorithm and the systematic weight based learning starts here at this step. Systematic weight learning method is the one which adds weights to the data to form a synthetic data for learning purpose. Thus in each iteration process of bargaining follows a 'weight reduction technique' i.e., If the weights added up is very close or within the tolerance level then the data with added weights will not appear in the next iteration. This saves the time in learning process. Continuous bargaining results in effective time bound learning methodology with profit/loss. Moreover, the technique of bargaining may result failure in some attempts of bargaining and it has been recorded as bargain chart which clearly mentions the bargain failure at specific iteration.

Step 4

Relative Variation (Statistical analysis)

Finding the mean for sample data

$$\mu = \frac{\sum x}{n}$$

Where 'x' is the data and 'n' represents the number of data points

Standard deviation for the data

$$\sigma = \sqrt{\frac{\sum(x-\mu)^2}{n-1}}$$

Coefficient of variation (CV) can be calculated as

$$CV = \frac{\sigma}{\mu}$$

This step checks the relative variation between the synthetic data and the field data taken for study. The uncertainties involved in the data process can be analyzed using this relative variation.

Step 5

Profit/ Loss

The algorithm checks with the permissible error percent and conditions the loop to break or to proceed. Profit can be obtained if the data fits in the tolerance value but the accuracy and precision is based on the error percent. Thus the algorithm may continue its iteration though small amount of profit is obtained. The algorithm continuously iterating until it attains the maximum profit (the desirable one)

Step 6

Performance Evaluation

L2 – norm is the performance evaluation based on least square estimates. It is basically minimizing the sum of square of the differences (E) between the target (Y_i) and estimated values (f(x_i))

$$E = \sum_{i=1}^n (Y_i - f(x_i))^2$$

Feed forward Technique

A feedforward neural network is a sorting method motivated by biology. It is made up of a (probably massive) number of basic neuron-like computing modules that are arranged in layers. Per unit in a layer is linked to a unit in the preceding stage. These relations are never exactly the same: each

one might be of varying intensity or weight. The weights on these links encode a channel's information. The modules in a neural network are frequently referred to as nodes.

Data joins the system at the inputs and travels through the network, layer by layer, until it reaches the outcomes. There really is no feedback among layers throughout normal activity, that is, when it serves as a classification model. This is why they're referred to as feedforward neural networks.

Radial Basis Function Network

At its most basic form, an RBF network is a three-layer feedforward neural network. The first layer contributes to the network's inputs, the second is a concealed layer made up of a series of RBF non-linear activation modules, and the third contributes to the network's overall outcome. RBFN trigger functions are typically configured as Gaussian functions. The general form of RBF is

$$f(x) = \sum_{i=1}^n \omega_i K(\|X - \mu\|)$$

Where, K is a positive non linear symmetric radial function; X is the input pattern and μ is the centre of the function.

Generalised Regression Neural Network

One among the most common neural networks is GRNN, which is a form of regulated FFNN. The GRNN architecture is made up of four layers: The first layer serves as the input layer and is fully wired to the second layer. The second layer is the first one that is covered (also called the pattern layer). The second secret layer (Summation layer) has two nodes in the third layer. The output layer is the fourth layer. It takes the two hidden layer outputs and splits them to get an approximation for y. (or to provide the prediction result).

Let $f(x, y)$ represent the continuous probability density function of a vector random variable, X, and a scalar random variable, Y. Let x represent a specific calculated value of the random X. The regression of Y given x (also known as the conditional variance of Y given x) is calculated as follows

$$E[Y/x] = \int_{-\infty}^{\infty} Y \cdot f(Y/x) dy = \frac{\int_{-\infty}^{\infty} Y \cdot f(x, Y) dy}{\int_{-\infty}^{\infty} f(x, Y) dy}$$

Probabilistic Neural Network

Pnns are frequently more reliable than ffnn, and training pnns is often easier than training ffnn. The most significant benefits of pnns are the reality that the outcome is probabilistic, making analysis of the performance simple, and the training frequency. PNN's basic composition consists of four layers. The input layer is the initial layer The pattern layer is. The secondary level. The summation layer is the next layer. The output layer is the final layer (also called decision layer). The use of PNN is particularly useful because of its capacity to correlate to the fundamental function of the dataset with only a small number of training samples present. The output of the i^{th} pattern neuron in the k^{th} group is computed using a Gaussian kernel of the form

$$f_{Ai}(X) = \frac{1}{(2\pi\sigma^2)^{p/2}} \exp\left[-\frac{(X - X_{Ai})^T - (X - X_{Ai})}{2\sigma^2}\right]$$

Where, i is the pattern number.

P denotes the dimension of pattern vector x .

σ is the smoothing parameter of Gaussian kernel.

X_{ai} is the centre of kernel.

Results and Discussion

Intelligent data analysis can interpret geophysical data with accurate and plausible results. Though the geophysical parameter involves lot of noises and errors, intelligent data analysis can filter and manage the data to provide optimized solution. Geoelectrical data is one of the such kind with noises from heterogeneous media of earth. This errors and noises will suppress the original sub surface geology of the data.

Table 1 shows the performance of different types of algorithm in comparison with BO algorithm. The table shows the performance of Feed forward, Radial basis Network, Exact Radial Basis network, Generalised Regression Neural Network, Probabilistic Neural Network in comparison with BO algorithm.

The values of MSE, PSNR, R- Value, RMSE (Root Mean Square Error), NRMSE, MAPE, Computational Time.

The comparison of the performance function from different algorithm with the Bargaining Optimization algorithm is stated below.

Mean Square Root (MSE)

In General, the mean squared error (MSE) of an optimization technique in statistics calculates the sum of the squares of the errors—that is, the average squared discrepancy between the expected and real values.

$$MSE = \frac{\sum_{i=1}^N (d_i - o_i)^2}{N}$$

Where,

N – Number of training data

D_i – Desired Output Value

O_i – ANN’s Output Value

The MSE value of Feedforward Network is much higher when compared to other algorithms. The MSE obtained from Generalized Regression Neural Network is 0.10 representing that the algorithm is much accurate than other techniques. BO algorithm is the second most accurate technique which states that it is better for prediction.

Peak Sound to Noise Ratio

Peak signal-to-noise ratio (PSNR) is an equation for the ratio of a signal's highest potential value (power) to the power of altering noise that influences the accuracy of its representation.

$$PSNR = 10 \times \log_{10} \left(\frac{(2^n - 1)^2}{MSE} \right)$$

According to the obtained PSNR values, Generalized Regression Neural Network has the highest value of PSNR ratio with 57.9.

R – Value

The coefficient of correlation is denoted by the letter R. It indicates how well the expected outputs align with actual outputs, with R close to 1 indicating a good qualified network and 0.2 and 0.3 indicating a poor network. The R values of all the algorithm are nearly equal to 1.

Root Mean Square Error (RMSE)

The root of the mean square error value gives

the RMSE values.

$$RSME = \sqrt{\frac{\sum_{i=1}^N (d_i - o_i)^2}{N}}$$

RMSE has never been negative, and a value of 0 (which is almost never obtained in reality) indicates a great match to the results. In general, a lower RMSE is preferable to a higher RMSE. The value of RMSE is BO algorithm is lower than all the other algorithms, which indicated that the Bargaining Optimization is more preferable to predict the values.

Normalized root mean square error (NRMSE):

$$NRMSE = \frac{\sqrt{MSE}}{\sum_{i=0}^P \frac{\max(d_i) - \min(d_i)}{p}}$$

Where,

P = number of output processing elements

D_i – Desired Output Value

MSE- Mean Squared error

Mean Absolute Percentage Error (MAPE):

Since MAPE is a calculation of error, higher values are weak and lower values are great.

$$MAPE(\%) = \frac{1}{n} \sum_{i=1}^n \left\{ \left| \frac{A_t - F_t}{A_t} \right| \times 100 \right\}$$

Where,

A_t – Actual Value

F_t – Forecasted Value

The MAPE value we got for BO algorithm is less than 10 percentage, which shows that the technique is very much accurate. Whereas the Feedforward and probabilistic neural network has the higher values of MAPE which corresponds to less accuracy.

Computational Time

The amount of time needed to complete a computing task is referred to as computation time. The computational time for feedforward technique is more time taking whereas the Bargaining Optimization Algorithm is the fastest algorithm which gives the most approximate outcome.

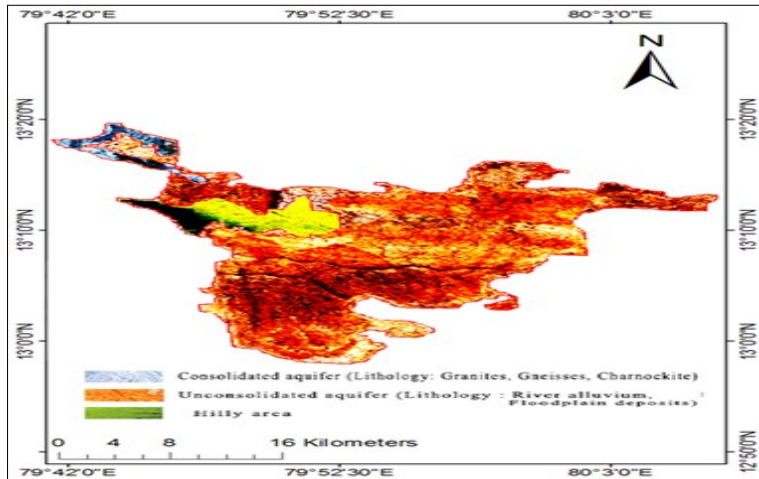


Figure 1. Geology of the study area (13.1382° N, 79.9071° E)

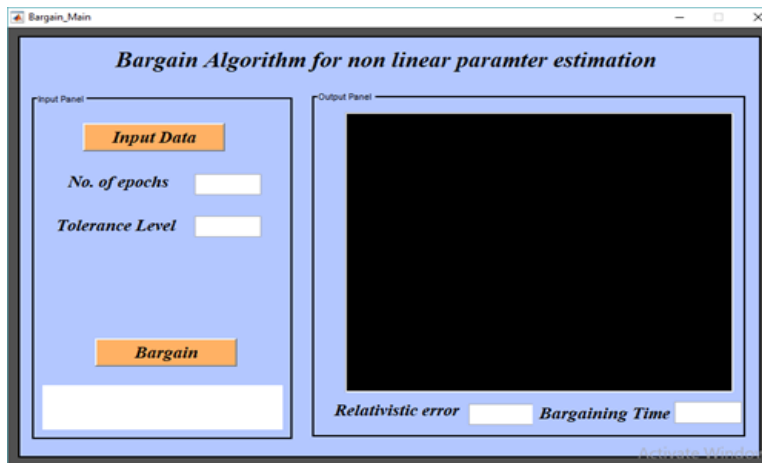


Figure 2. Main Panel for inverting geoelectrical data

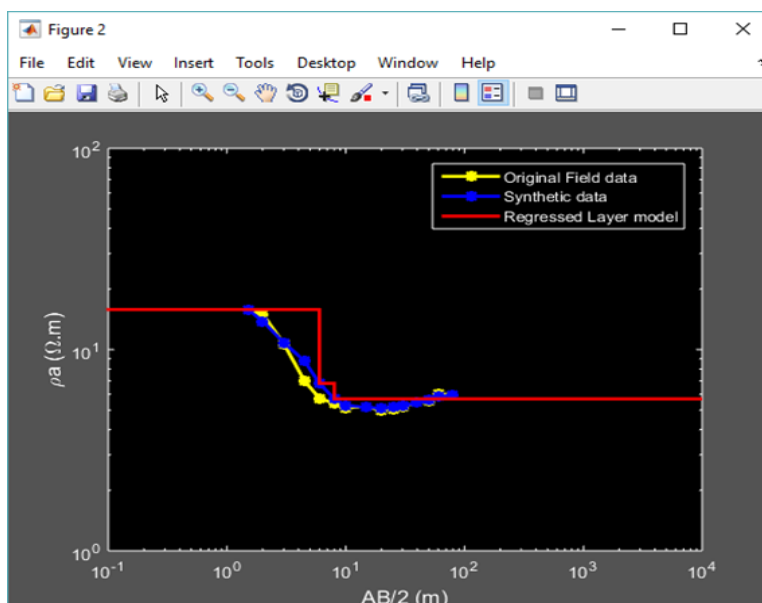


Figure 3. Inversion of Geoelectrical data using BO algorithm

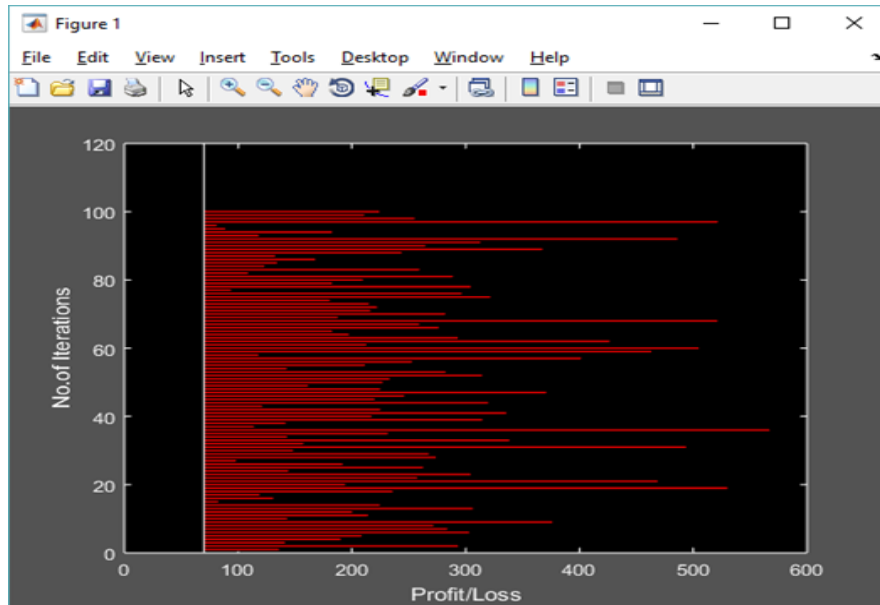


Figure 4. Profit/ loss- Graphical representation of Data 1

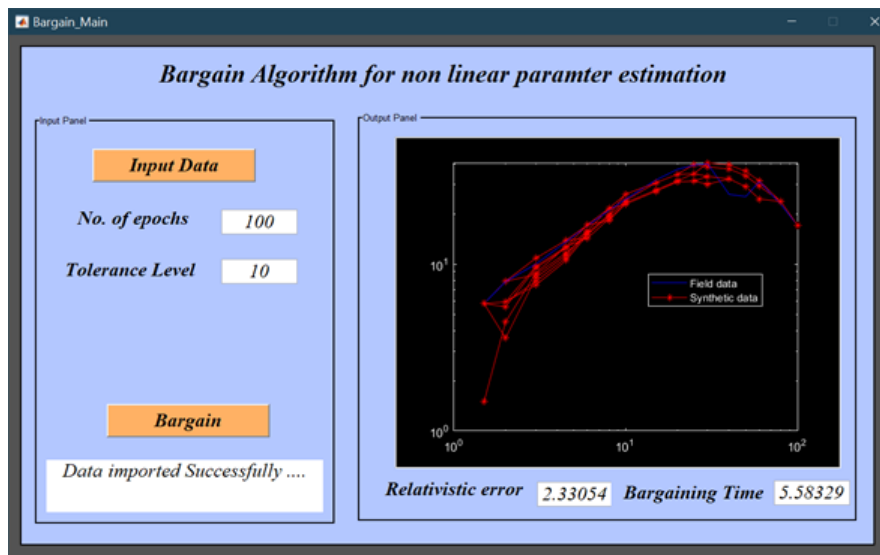


Figure 5. Main panel for inverting geoelectrical data (Data 2)

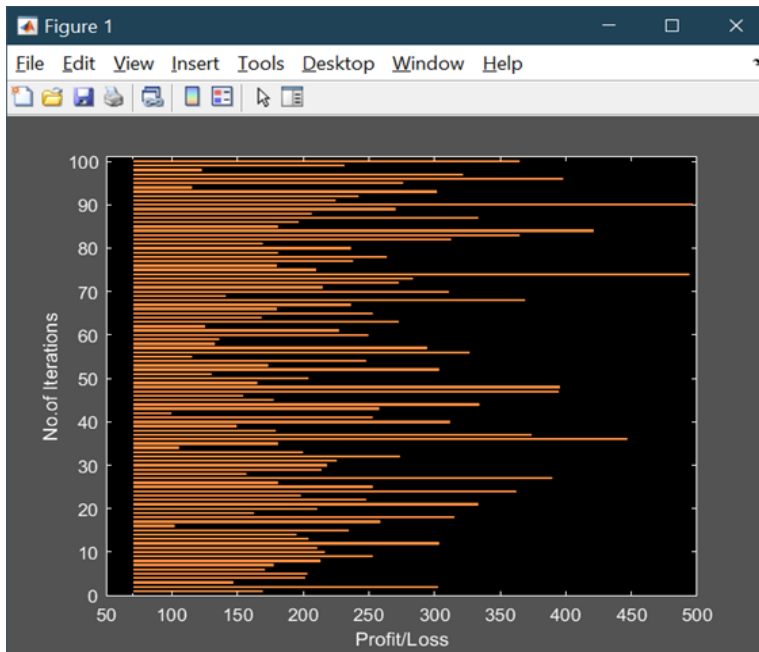


Figure 6. Profit/ loss- Graphical representation of Data 2

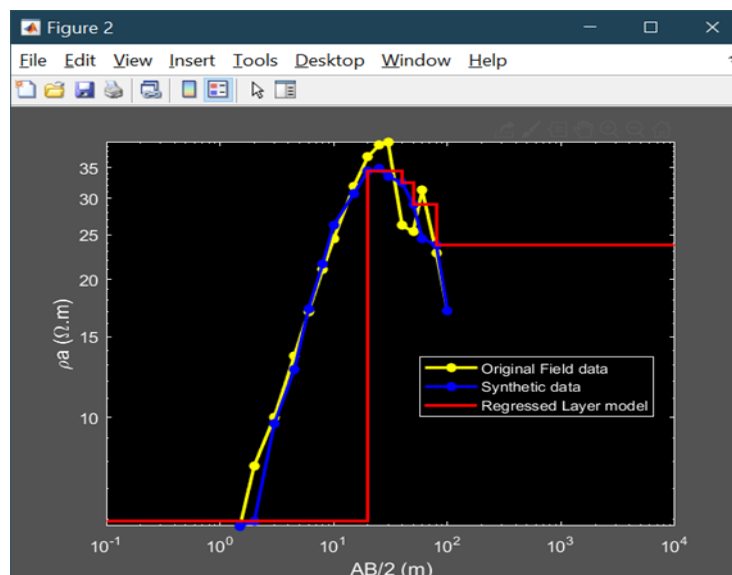


Figure 7. Inverted geoelectrical model for data2

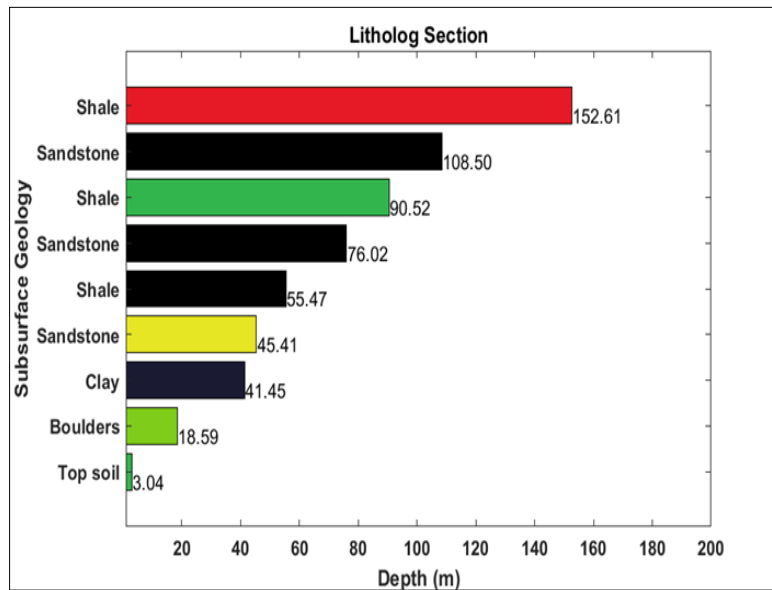


Figure 8. Litholog section.

Table 1. Performance of different types of algorithm in comparison with BO algorithm

S. No	Algorithm	MSE	PSNR	R Value	RMSE	NRMSE	MAPE	COMPUTATIONAL TIME
1.	Feedforward	65.03	29.9	0.98	8.064	0.0698	11.22	125.25
2.	Radial basis network	7.8	31.9	0.98	2.79	2.41	4.9	6.32
3.	Exact Radial Basis network	8.1	31.9	0.98	2.8	2.46	5.19	13.2
4.	Generalised regression neural networks	0.10	57.9	0.97	0.32	0.21	0.48	3.4
5.	Probabilistic neural networks	6.78	9.8	0.94	81.9	0.70	98.1	2.99
6.	Bargain Optimization	5.4	4.0	0.99	2.3	0.02	4.9	2.3

Fig 1 represents the geology of the study area. Fig 2 shows the Graphical User Interface (GUI) of bargain optimization algorithm for inverting geoelectrical data. The main panel contains the push button for importing data. The user can give the number of epochs and tolerance level for training the data. After successful bargaining, the system will provide the geoelectrical model with relativistic error and bargaining time. Fig 3 shows that inversion of geoelectrical data 1. The profit/loss diagram is shown in fig 4. This diagram explains about the concept of bargaining. If the bargaining is successful the profit will be more during the number of iterations. If the bargaining fails, loss will be more and the bargaining time will also increase. Relativistic error will represent the difference between the original and the synthetic field data. Fig 5 represents the main panel for inverting geoelectrical data 2. Fig 6 and fig 7 represents the profit/loss diagram and the inverted geoelectrical model respectively. Fig 8 represents lithology section of the study area.

References

1. Beck, A.E. (1991) Physical principles of exploration methods, Wuer2 publications, 2nd edition: 4-6.
2. Bosch M, mcgaughey J (2001) Joint inversion of gravity and magnetic data under lithologic constraints. *Lead Edge* 20(8):877–881. <https://doi.org/10.1190/1.1487299>.
3. El Qady G and Ushijima K 2001 Inversion of dc resistivity data using neural networks; *Geophys. Prospect.* 49 417–430.
4. Gallardo LA, Meju MA (2004) Joint two-dimensional DC resistivity and seismic travel time inversion with cross-gradients constraints. *J Geophys Res: Solid Earth* 109(B3):B03311. <https://doi.org/10.1029/2003JB002716>.
5. Khishe, M., Safari, A. Classification of Sonar Targets Using an MLP Neural Network Trained by Dragonfly Algorithm. *Wireless Pers Commun* 108, 2241–2260 (2019). <https://doi.org/10.1007/s11277-019-06520-w>
6. Mosavi, M.V., Mohammad Khishe, Moridi, A (2015) Classification of Sonar Target using Hybrid Particle Swarm and Gravitational Search, *Marine Technology* 3(3):1-10.0
7. Mosavi, M.V., Mohammad Khishe (2020) Classification of underwater acoustical dataset using neural network trained by Chimp Optimization Algorithm, *Applied Acoustics* 157, 107005
8. Lines L, Schultz A, Treitel S (1988) Cooperative inversion of geophysical data. *Geophysics* 53(1):8–20. <https://doi.org/10.1190/1.1442403>
9. Louis I F, Louis F L and Grambas A 2002 Exploring for favorable groundwater conditions in hard rock environments by resistivity imaging methods: Synthetic simulation approach and case study example; *J. Electr. Electron. Eng., Spec. Issue*, pp. 1–14 ([http://www. Geophysicsonline.gr/paper-10.pdf](http://www.Geophysicsonline.gr/paper-10.pdf)).
10. Lowrie W. (2007). *Fundamentals of Geophysics*, 2ed. 84-87.
11. Maiti S, Gupta G, Erram V C and Tiwari R K 2011 Inversion of Schlumberger resistivity sounding data from the critically dynamic Koyna region using hybrid Monte Carlo-based neural network approach; *Nonlinear Process Geophys.* 18 179–192.
12. Paasche H, Tronicke J (2007) Cooperative inversion of 2D geophysical data sets: a zonal approach based on fuzzy c-means cluster analysis. *Geophysics* 72 (3):35–39. <https://doi.org/10.1190/1.2670341>
13. Satyendra Narayan, Maurice B Dusseault and David C Nobes 1994 Inversion techniques applied to resistivity inverse problems; *Inverse Problems* 10 669–686.
14. Singh U K, Tiwari R K and Singh S B 2010 Inversion of 2D DC resistivity data using rapid optimization and minimal complexity neural network; *Nonlinear Process Geophys.* 17 1–12.
15. Srinivas Y, Stanley Raj A, Hudson Oliver D, Muthuraj D and Chandrasekar N 2010 An application of Artificial Neural Network for the interpretation of three layer electrical resistivity data using Feed Forward Back Propagation Algorithm; *Curr. Dev. Artif. Intel.* 1 1–11.
16. Srinivas Y, Stanley Raj A, Hudson Oliver D, Muthuraj D and Chandrasekar N 2012 A robust behavior of Feed Forward Back propagation algorithm of Artificial Neural Networks in the application of vertical electrical sounding data inversion; *Geosci.*

- Frontiers 3(5) 729–736.
17. Sri Niwas and Singhal D C 1981 Estimation of aquifer transmissivity from Dar-Zarrouk parameters in porous media; J. Hydrol. 50 393–399.
 18. Stanley Raj, A., Srinivas, Y., Damodharan, R., chendhoorb.,Sanjay Vimal M (2020) Genetic Algorithm Coupled with Neural Networks to Guesstimate the Subsurface Features of the Earth. Journal of Model Based Research - 1(3):13-27.
 19. Srinivas Y, Stanley Raj A, Hudson Oliver D, Viswanath, J. (2018) Bargain optimization algorithm for non linear parameter optimization. Mathematical Sciences International Research Journal 7(3):6-13.
 20. Telford W.M., Geldart L.P. and Sheriff R.E. (1990). Applied geophysics, second edition Cambridge, New York.
 21. Yadav G.S. (1995). A FORTRAN computer program for the automatic interactive method of resistivity sounding interpretation, Acta Geodaetica et geophysicahungarica, 30(2-4), 363-377.